

図面番号

0FL-20(2)

種 目

側 溝

品 名

ﾀﾞｲﾔ可変(自由勾配)側溝_本体・ふた


規 格

500, 600

備 考

形状及び配筋


(本体)

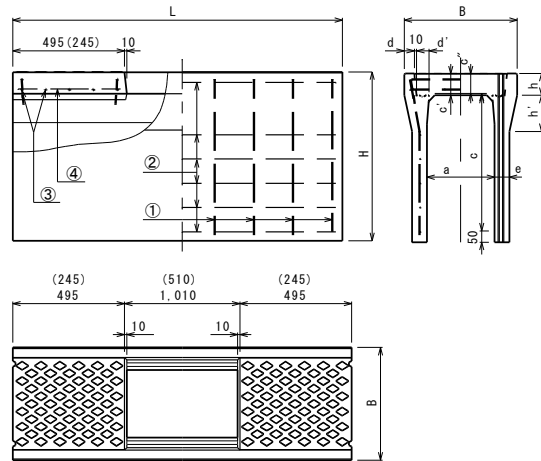

※()内数値は、長さL=1.0mを示す。

(ふた)

車道用

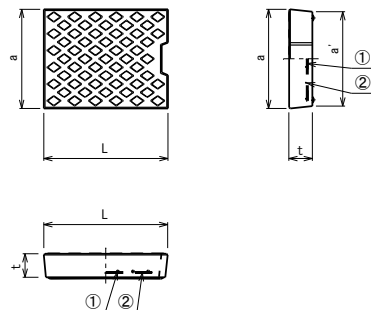

呼 び 名		寸 法 表				配 筋				重量 (Kg)
		a	a'	t	L	①		②		
						径 (mm)	本数	径 (mm)	本数	
車道用	500	600	580	125	500	D10	5	6.00	5	84
	600	700	680	140			6		6	109
許 容 差		+5, -3		±3		+5, -3		-----		

寸法・配筋表

呼び名	寸 法 (mm)											側 壁 部 配 筋				梁 部 配 筋				参考質量 (kg)					
	B	H	a	c	c'	c''	d	d'	e	h	h'	L	①		②		③		④						
													径(mm)	数	径(mm)	数	径(mm)	数	径(mm)		数				
500× 400	720	577	500	390	135	125	55	56.5	80	127	175	1,000	5.00	7	3.20	4	D10	4	5.00	6	313				
500× 500		677		490										7		5					350				
500× 600		777		590										10		6					387				
500× 700		877		690										10							424				
500× 800		977		790									D6	7	4.00	7					461				
500× 900		1,077		890				7	561																
500× 1,000		1,177		990				8	605																
500× 1,100		1,277		1,090				9	649																
500× 1,200		1,377		1,190				10	693																
500× 1,300		1,477		1,290				11	737																
500× 1,400		1,577		1,390				D10	7				5.00	D13	3	6.00					7	781			
600× 400	830	592	600	150	140	60	59	85	142	185	5.00	7	3.20				4	361							
600× 500		692										490					7	5	401						
600× 600		792										590					9	6	440						
600× 700		892										690					11		479						
600× 800		992									790	D6	6				4.00	7	519						
600× 900		1,092					890	8			558														
600× 1,000		1,192					990	63			100								200				8	669	
600× 1,100		1,292					1,090																9	715	
600× 1,200		1,392					1,190																10	761	
600× 1,300		1,492					1,290																11	807	
600× 1,400		1,592					1,390					D10	6	5.00	11								835		
600× 1,500	1,692	1,490	7	900																					
許 容 差	±7	±5	±7	±5	±3	—	+3, -2		—	+3, -2		—	—	±5	—										

呼び名	寸 法 (mm)											側 壁 部 配 筋				梁 部 配 筋				参考質量 (kg)									
	B	H	a	c	c'	c''	d	d'	e	h	h'	L	①		②		③		④										
													径(mm)	数	径(mm)	数	径(mm)	数	径(mm)		数								
500× 400	720	577	500	400	125	—	55	54.5	60	127	160	2,000	5.00	13	3.20	4	D6	8	4.00	6	532								
500× 500		677		500										14		587													
500× 600		777		600				56.5	70	170				19		710													
500× 700		877		700										20		775													
500× 800		977		800						D6			13	4.00	6						840								
500× 900		1,077		900				59.5	85				180								7	1,032							
500×1,000		1,177		1,000																	16	8	1,111						
500×1,100		1,277		1,100																	18	9	1,190						
500×1,200		1,377		1,200				61	95				190								19	1,383							
500×1,300		1,477		1,300																	22	10	1,471						
500×1,400		1,577		1,400						D10			13	5.00							7					1,559			
600× 400	830	592	600	400	140	—	60	56.5	65	142	170	5.00	13	3.20	4	D10	4	4.00	633										
600× 500		692		500									14		694														
600× 600		792		600									17		754														
600× 700		892		700				59	75				180						22	885									
600× 800		992		800								D6							12	4.00	7	955							
600× 900		1,092		900									15	8	1,024														
600×1,000		1,192		1,000				61.5	90				190						17		1,234								
600×1,100		1,292		1,100															17		9	1,318							
600×1,200		1,392		1,200															20		1,402								
600×1,300		1,492		1,300				63	100				200				21	1,608											
600×1,400	1,592	1,400	D10	12	5.00	11	1,701																						
600×1,500	1,692	1,500	14	—						1,794																			
許容差	±7	±7	±5						±3	—	+3,-2	—	+3,-2	—	—	±5													