


種目	側溝	品名	自由勾配側溝(AVS) 800	規格	800×600~1800	備考
----	----	----	-----------------	----	--------------	----

形状寸法

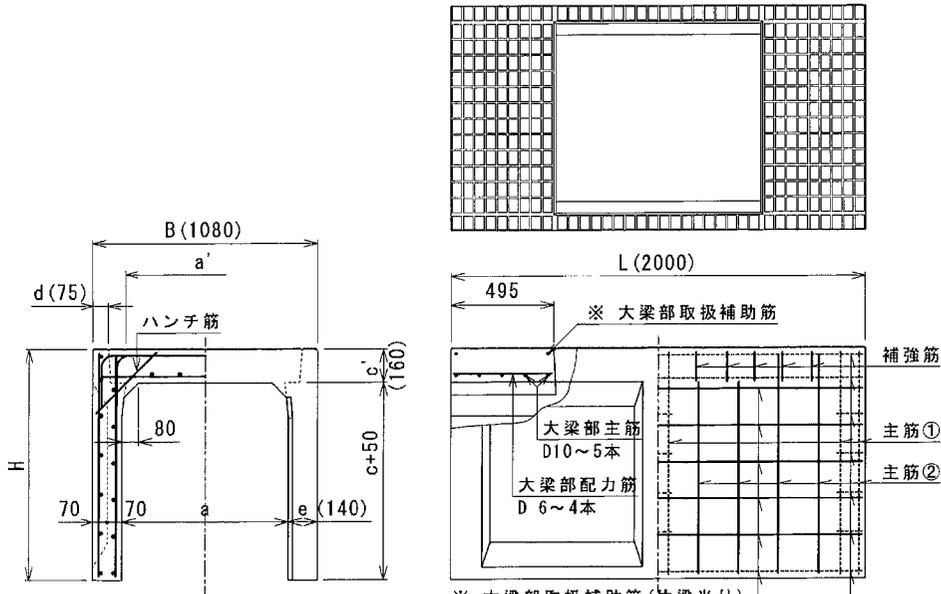

※ 大梁部取扱補助筋(片梁当り)
 c= 600~1100は、D 6~2本
 c=1200~1800は、D10~2本

● 寸法許容差

許容差 (mm)	B・H・a・c	d・e	c'	L
	±7	+4 -2	±4	±5

呼び名 (a×c)	寸法(mm)		側壁部配筋(片側当り)								ハンチ筋 (片梁当り)		参考質量 (kg)	曲げ強さ 荷重P (kN/片梁)							
	H	a'	主筋①		配力筋①		主筋②		配力筋②		補強筋				径(mm)	数					
800×600	810	768	D 6	9	5.0	6	4.0	13	4	5.0	10	D 6	2	1110	35.5						
×700	910													5	6	15	5	1200	36.0		
×800	1010													6	7	17	6	1280			
×900	1110													7	8	11	7	1360			
×1000	1210													8	9	13	7	1450			
×1100	1310													9	10	15	7	1530			
×1200	1410													D 10	7	D 6	8	10	6	1610	
×1300	1510													8	9	12	6	1690			
×1400	1610													9	10	14	7	1780			
×1500	1710													10	11	15	7	1870			
×1600	1810	764	D 13	6	11	D 6	15	D 6	8	D 6	10	D 10	4	1950	35.5						
×1700	1910													16	8	2030	35.0				
×1800	2010													17	8	2110	34.5				
														18	8						