

図面番号

OFL-16(1)

種 目

側 溝

品 名




自由勾配側溝 (FX) (1)

規 格

300×300~400×1300



備 考

形状寸法及び配筋

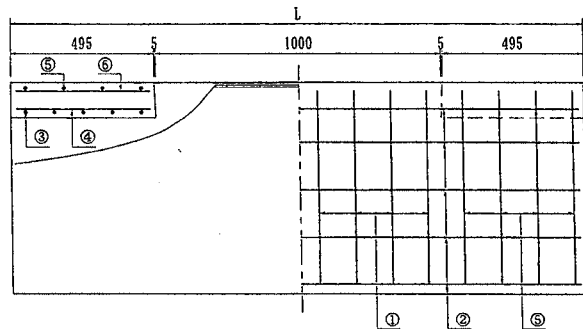
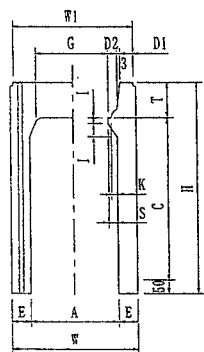


蓋 板

歩道用

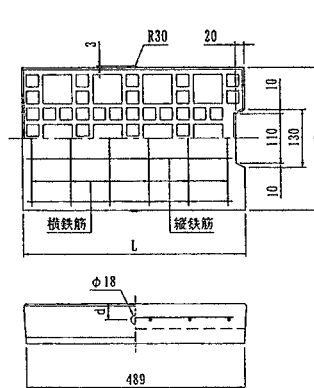

車道用

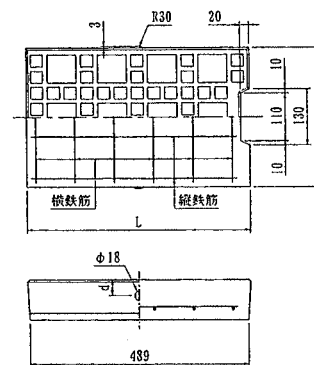

寸法及び配筋表

呼び名 (幅×深)	寸 法															鉄 筋														参考質量 (kg)
	A	C	W	W1	H	T	D1	D2	E	G	I	J	K	S	L	①		②		③		④		⑤		⑥		⑦		
																径	数	径	数	径	数	径	数	径	数	径	数	径	数	
300×300	300	298	420	430	435	87	45	35	60	254	30	65	21	29	2000	D6	6×2	φ4	4×2	D6	3×2	φ4	3×2	D6	3×4	315				
300×400		398			535														428											
300×500		498			635														514											
300×600		598			735														575											
300×700		698			835														714											
300×800		798			935											D6	4×2	φ4	4×4	D6	5×4	784								
300×900		898			1035																	948								
300×1000		998			1135																	1029								
300×1100		1098			1235																	1107								
300×1200		1198			1335																	447								
400×400	400	398	530	540	550	102	50	40	65	344	40	70	26	39	2000	D6	6×2	φ4	4×2	D6	3×2	φ4	3×2	D6	3×4	508				
400×500		498			650														569											
400×600		598			750														665											
400×700		698			850														730											
400×800		798			950														884											
400×900		898			1050											D6	5×2	φ4	4×4	D6	5×4	959								
400×1000		998			1150																	1139								
400×1100		1098			1250																	1223								
400×1200		1198			1350																	1308								
400×1300		1298			1450																	許容差	± 5	± 3	—	± 3	± 5	—	—	—

蓋板寸法及び配筋表

呼び名		寸 法										鉄 筋				参 考 質 量 (kg)	
		a	a1	b	c	t	t1	t2	t3	d	L	横 鉄 筋		縦 鉄 筋			
												径	数量	径	数量		
歩道用	300	322	210	315	272.5	85	69.7	50	35	35	499	4	6	4	3	24	
	400	422	300	413	363.2	100	82.0	55	45	40		4		4	34		
車道用	300	322		315	272.5	85	69.7			35	499	6		4	3	31	
	400	422	—	413	363.2	100	82.0	—	—	40		D6	7		4	4	47
許 容 差		+ 5、- 3				± 3				+5-3		—				—	