

種 目

側 溝

品 名

自由勾配側溝(ﾀﾞｲﾔｸ可変側溝無騒音型)本体・ふた

規 格


本体 500×400～600×1,500
ふた 500, 600

備 考

形状及び配筋


寸法・配筋表

(本体)

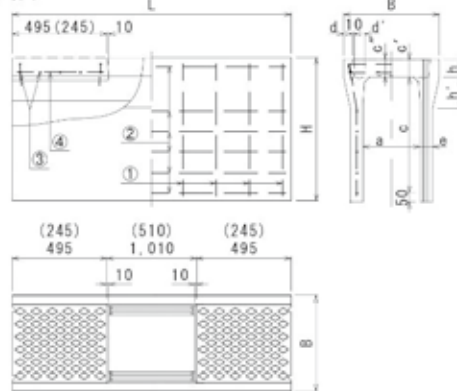

図()内数値は、長さL=1.0mを示す。

(ふた)



呼び名	寸 法 (mm)				配 筋				重量 (kg)
	a	a'	t	L	径 (mm)	本数	径 (mm)	本数	
500	600	580	125	500	Ø10	5	6.00	5	84
600	700	680	140	500	6	6	6.00	6	109
許容差	±5.3				±7				±5.3

呼び名	寸 法 (mm)											L	側 壁 部 配 筋				梁 部 配 筋				参考質量 (kg)	
	B	H	a	c	c'	c''	d	d'	e	h	h'		①		②		③		④			
													径(mm)	本数	径(mm)	本数	径(mm)	本数	径(mm)	本数		
500×400	720	577	500	290	135	125	55	56.5	80	127	175	1,000	5.00	7	3.20	4	Ø10	4	5.00	6	313	
500×500		677		490																	5	350
500×600		777		590																	6	387
500×700		877		690																	7	424
500×800		977		790																	8	416
500×900		1,077		890																	9	561
500×1,000		1,177		990																	10	605
500×1,100		1,277		1,090																	11	649
500×1,200		1,377		1,190																	12	693
500×1,300		1,477		1,290																	13	737
500×1,400	1,577	1,390	14	781																		
600×400	830	592	600	290	150	140	60	59.0	85	142	185	5.00	7	3.20	4	Ø13	3	6.00	7	361		
600×500		692		490																5	401	
600×600		792		590																6	440	
600×700		892		690																7	479	
600×800		992		790																8	519	
600×900		1,092		890																9	558	
600×1,000		1,192		990																10	609	
600×1,100		1,292		1,090																11	715	
600×1,200		1,392		1,190																12	761	
600×1,300		1,492		1,290																13	807	
600×1,400	1,592	1,390	14	835																		
600×1,500	1,692	1,490	15	900																		
許容差	±7	±5	±7	±5	±3	—	+3.2	—	+2.2	—	—	±5	—				—					

呼び名	寸 法 (mm)											L	側 壁 部 配 筋				梁 部 配 筋				参考質量 (kg)				
	B	H	a	c	c'	c''	d	d'	e	h	h'		①		②		③		④						
													径 (mm)	本数	径 (mm)	本数	径 (mm)	本数	径 (mm)	本数					
500 × 400	720	577	500	400	125	—	55	54.5	60	127	160	2,000	5.00	13	3.20	4	Ø6	8	4.00	6	532				
500 × 500		677		500										5		587									
500 × 600		777		600				56.5						70		170					19		710		
500 × 700		877		700												20					6	775			
500 × 800		977		800										Ø6	13	4.00						840			
500 × 900		1,077		900				59.5					85								180	7	1,032		
500 × 1,000		1,177		1,000																	16	8	1,111		
500 × 1,100		1,277		1,100																	18	9	1,190		
500 × 1,200		1,377		1,200				61.0					95	190	18						1,383				
500 × 1,300		1,477		1,300										19	10	1,471									
500 × 1,400	1,577	1,400			D10	13	5.00		1,559																
600 × 400	830	592	600	400	140	—	60	56.5	65	142	170	5.00	13	3.20	4	Ø10	4	4.00	7	633					
600 × 500		692		500									5		694										
600 × 600		792		600											17						754				
600 × 700		892		700				59.0					75		180					22	6	885			
600 × 800		992		800											Ø6					12	4.00	7	955		
600 × 900		1,092		900																		15		1,024	
600 × 1,000		1,192		1,000				61.5					90									190		8	1,234
600 × 1,100		1,292		1,100																		17	9	1,318	
600 × 1,200		1,392		1,200											20						1,402				
600 × 1,300		1,492		1,300				63.0					100		200					21	10	1,608			
600 × 1,400	1,592	1,400			D10	12	5.00	11	1,701																
600 × 1,500	1,692	1,500				14		1,794																	
許容差	±7	±5	±7	±5	±3	—	+3.2	—	+3.2	—	—	±5	—				—								