

種目

側溝


品名

自由勾配側溝(AVS)(2)

規格

500×400~600×1500


備考

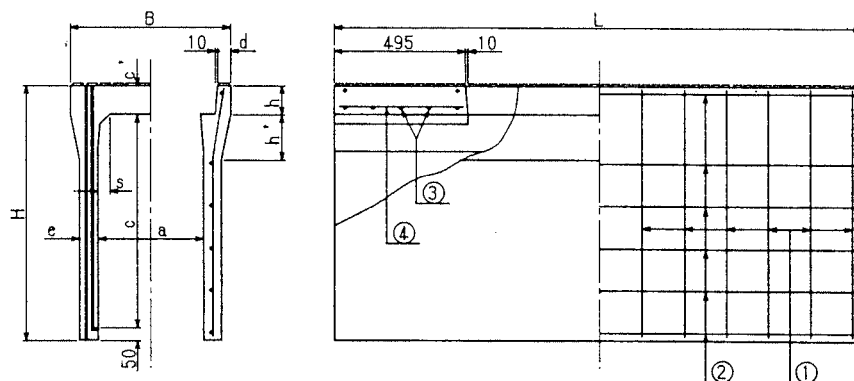形状寸法及び配筋
本体

盖板

(車道用)

(軽荷重用)

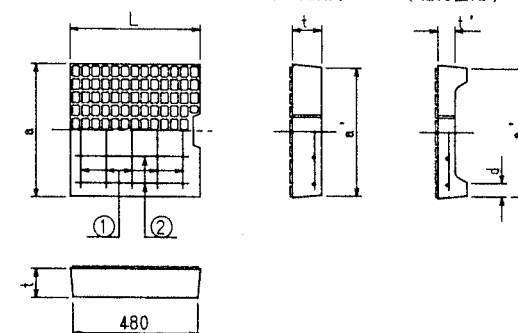

寸法及び配筋表

呼び名	寸法 (mm)											鉄筋				参考重量 (kg)
	B	H	a	c	c'	d	e	h	h'	s	L	① 径 本数	② 径 本数	③ 径 本数	④ 径 本数	
500×400		575		400				60				13	4			545
×500		675		500								14	3.2	5		600
×600		775		600								19				715
×700		875		700				70		50		20				780
×800		975		800									6			845
×900		1075		900								13	7	D 6	8	1040
×1000		1175		1000								16	4.0	8		1120
×1100		1275		1100								18		9		1200
×1200		1375		1200								19				1390
×1300		1475		1300								22				1480
×1400		1575		1400								D10	13	5.0	10	1570
600×400		590		400								13	4			640
×500		690		500				65		50		14	3.2	5		700
×600		790		600								17		6		760
×700		890		700								22				890
×800		990		800				75		60		12		7		960
×900		1090		900								15	7	D10	4	1030
×1000		1190		1000								17	4.0	8		1240
×1100		1290		1100								20		9		1320
×1200		1390		1200								21		10		1410
×1300		1490		1300								12				1620
×1400		1590		1400								D10	12	5.0	11	1710
×1500		1690		1500								14				1800
許容差	±7	±5	±7	±5	±3	+3 -2					±5					

寸法及び配筋表

呼び名	寸法 (mm)							鉄筋		参考重量 (kg)
	a	a'	d	t	t'	L		① 径 本数	② 径 本数	
車道用	500用	600	580		125	t'	500	D10	5	5
	600用	700	680		140			6	6.0	6
軽荷重用	500用	600	580		125	70	500	D 6	6	5
	600用	700	680		140	80		7	4.0	6
許容差		+5 -3			±3		+5 -3			

(注) 1. 本製品は、主として車道と平行して用いる。