

種 目

側 溝

品 名




自由勾配側溝 (FX) (1)

規 格

300×300~400×1300



備 考

形状寸法及び配筋

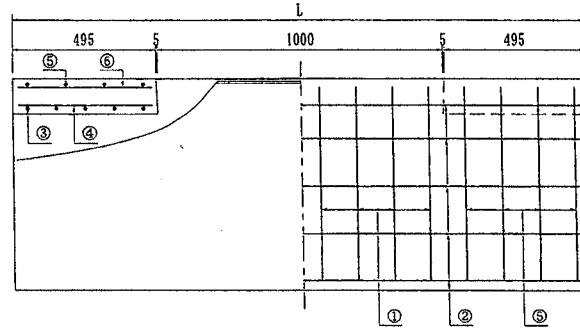
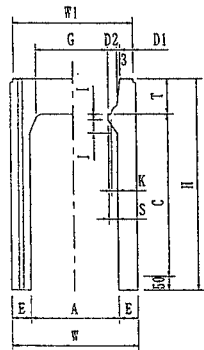


蓋 板

歩道用

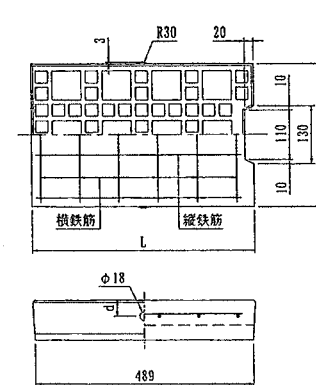

車道用

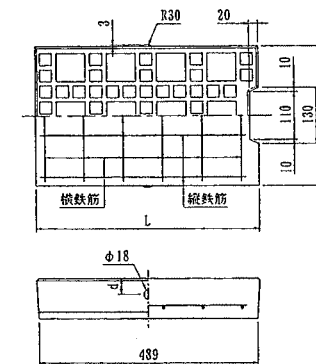

寸法及び配筋表

呼び名 (幅×深)	寸 法															鉄 筋							参考質量 (kg)							
	A	C	W	W1	H	T	D1	D2	E	G	I	J	K	S	L	①		②		③		④		⑤		⑥		⑦		
																径	数	径	数	径	数	径		数	径	数	径	数	径	数
300×300	300	298	420	430	435	87	45	35	60	254	30	65	21	29	2000	D6	6×2	φ4	4×2	D6	4×2	φ4	2×2	D6	3×2	φ4	3×2	D6	3×4	315
300×400		398			535																									371
300×500		498			635																									428
300×600		598			735																									514
300×700		698			835																									575
300×800		798			935																									714
300×900		898			1035																									784
300×1000		998			1135																									948
300×1100		1098			1235																									1029
300×1200		1198			1335																									1107
400×400	400	398	530	540	550	102	50	40	65	344	40	70	26	39	2000	D6	6×2	φ4	5×2	D6	5×2	φ4	3×2	D6	4×2	φ4	3×2	D6	4×4	447
400×500		498			650																									508
400×600		598			750																									569
400×700		698			850																									665
400×800		798			950																									730
400×900		898			1050																									884
400×1000		998			1150																									959
400×1100		1098			1250																									1139
400×1200		1198			1350																									1223
400×1300		1298			1450																									1308
許容差	± 5				± 3				-	± 3				± 5		-														

蓋板寸法及び配筋表

呼び名	寸 法										鉄 筋				参 考 質 量	
	a	a1	b	c	t	t1	t2	t3	d	L	横鉄筋	縦鉄筋	質 量			
											径	数量		径		数量
歩道用	300	322	210	315	272.5	85	69.7	50	35	35	499	4	6	4	3	24
	400	422	300	413	363.2	100	82.0	55	45	40		6	7	4	4	34
車道用	300	322		315	272.5	85	69.7			35	499	D6	6		3	31
	400	422	-	413	363.2	100	82.0	-	-	40		7	4	4	47	
許 容 差	+ 5、- 3				± 3				+5-3		—				—	