

種 目

側 溝

品 名

タイプ可変(自由勾配)側溝_本体・ふた


規 格

300, 400

備 考

形状及び配筋


(本体)

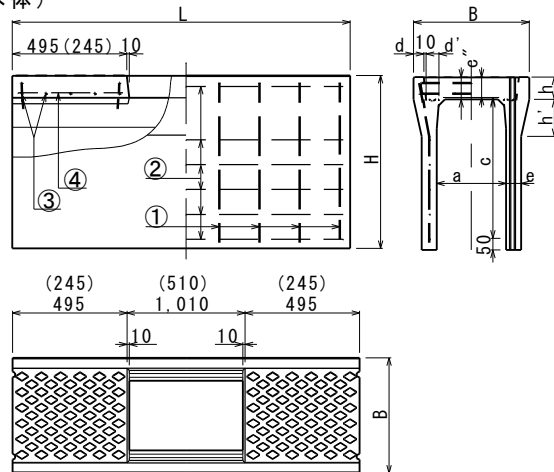

※()内数値は、長さL=1.0mを示す。

(ふた)

車道用

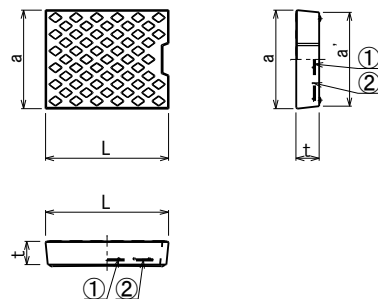

呼 び 名		寸 法 表				配 筋				重量
		a	a'	t	L	①		②		
						径(mm)	本数	径(mm)	本数	
車道用	300	400	380	95	500	D6	7	5.00	4	41
	400	500	480	110			9		5	60
許 容 差		+5,-3		±3		+5,-3		-----		

寸法・配筋表

呼び名	寸 法 (mm)											側 壁 部 配 筋				梁 部 配 筋				参考質量 (kg)									
	B	H	a	c	c'	c''	d	d'	e	h	h'	L	①		②		③		④										
													径(mm)	数	径(mm)	数	径(mm)	数	径(mm)		数								
300× 300	500	447	300	285	110	95	45	52.5	55	97	150	1,000	4.00	7	3.20	4	D6	4	4.00	4	178								
300× 400		547		385									7	203															
300× 500		647		485									5.00	7							228								
300× 600		747		585							165			8							297								
300× 700		847		685										10							329								
300× 800		947		785									D6	6	4.00	7					362								
300× 900		1,047		885							180			7							458								
300× 1,000		1,147		985										8							497								
300× 1,100		1,247		1085										9							536								
400× 400	610	562	400	385	125	110	50	54.5	60	112	160		5.00	7	3.20	4	D10	3	5.00	5	243								
400× 500		662		485										7							271								
400× 600		762		585										9							299								
400× 700		862		685							58.5			80							180	10	376						
400× 800		962		785									D6		7	4.00						7	411						
400× 900		1,062		885											190								7	446					
400× 1,000		1,162		985							61			90							8		551						
400× 1,100		1,262		1,085																	9		592						
400× 1,200		1,362		1,185																	10		634						
許 容 差	±5	±5	±5	±5	±3	---	+3,-2	---	+3,-2	---	---	±5	-----																

呼び名	寸 法 (mm)												側 壁 部 配 筋				梁 部 配 筋				参考質量 (kg)
	B	H	a	c	c'	c''	d	d'	e	h	h'	L	①		②		③		④		
													径(mm)	数	径(mm)	数	径(mm)	数	径(mm)	数	
300× 300	500	447	300	300	95	---	45	51.5	50	97	100	2,000	4.00	13	3.20	4	D6	5	4.00	4	322
300× 400		547		400		14									399						
300× 500		647		500		5.00		13							450						
300× 600		747		600				54.5	65		160		16	5	558						
300× 700		847		700									21	6	618						
300× 800		947		800		56.5		75	170		D6		12	4.00		754					
300× 900		1,047		900									14	7	824						
300× 1,000		1,147		1,000		58.5		85	180				16	8	986						
300× 1,100		1,247		1,100									18		1,065						
400× 400	610	562	400	400	110	---	50	54.5	60	112	160		5.00	13	3.20	4	D6	7	4.00	5	474
400× 500		662		500		14		5							532						
400× 600		762		600		17									588						
400× 700		862		700		58.5		70	170		20			6	710						
400× 800		962		800							D6			13	4.00				775		
400× 900		1,062		900										180		14		7	924		
400× 1,000		1,162		1,000												16		8	999		
400× 1,100		1,262		1,100		61		90	190					17	9	1,175					
400× 1,200		1,362		1,200										20	9	1,295					
許 容 差	±5	±5	±5	±5	±3	---	+3,-2	---	+3,-2	---	---	±5		-----							